



## DRILL WOOD, METAL, PLASTIC, COMPOSITIONS . . . SAND, POLISH, CUT HOLES, MIX ... AND MORE!









The basic power tool with a variety of uses — polishing, sanding, mixing and cutting holes.

#### SPECIAL PERFORMANCE FEATURES:


- Quick-Release Trigger Lock Button Ideal for continuous jobs such as drilling, sanding, wire brushing and polishing.
- Multi-Ball Thrust and Oll-Impregnated Sleeve Bearings ensure dependable, trouble-free high performance.
- Double Insulation provides maximum protection against electrical shock without grounding.

(A) SP-5014 Double Insulated 1/4" Deluxe Drill Specifications: Capacities: Steel ¼", Hardwood ½", 2250 RPM, ,2.5 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved.

(B) SP-5013 Double Insulated ¼" Home Workshop Drill Specifications: Capacities: Steel ¼", Hardwood ½", 2250 RPM, 2.3 AMPS, 115-125 V. 2ξ-60 Hz. U.L. Listed, C.S.A. Approved.

For Drill Accessories see pages 13, 14 and 15.

## IEW '5000' SERIES

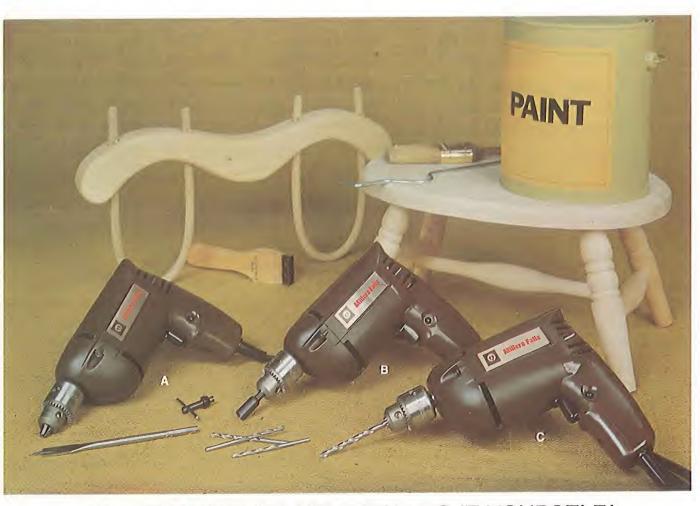

## BETTER WAYS TO HELP YOU DO-IT-YOURSELF!










Variable drill speeds meet specific requirements. High speeds for drilling wood, buffing and polishing; lower speeds for drilling metal and driving screws.

#### SPECIAL PERFORMANCE FEATURES:


- Quick-Release Trigger Lock Button ideal for continuous jobs such as drilling, sanding, wire brushing and polishing.
- Multi-Ball Thrust and Oil-Impregnated Sleeve Bearings ensure dependable, trouble-free high performance.
- **Double Insulation** provides maximum protection against electrical shock without grounding.
- Variable Speed Trigger Switch select the speed to match the job from 0 to 1,000 RPM. Drive screws, cut threads, start holes without center-punching (SP-5021 only).
- (A) SP-5021 Double Insulated %" Variable Speed Deluxe Drill Specifications: Capacities: Steel %", Hardwood %", 0 to 1,000 RPM, 2.5 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved.
- (B) SP-5020 Double Insulated 3/4" Deluxe Drill Specifications: Capacities: Steel %", Hardwood %4", 1,000 RPM, 2.5 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved.
- (C) SP-5023 Double Insulated %" Home Workshop Drill Specifications: Capacities: Steel 36", Hardwood 34", 1,000 RPM, 2.3 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved.

For Drill Accessories see pages 13, 14 and 15.

# OOO'SERIES

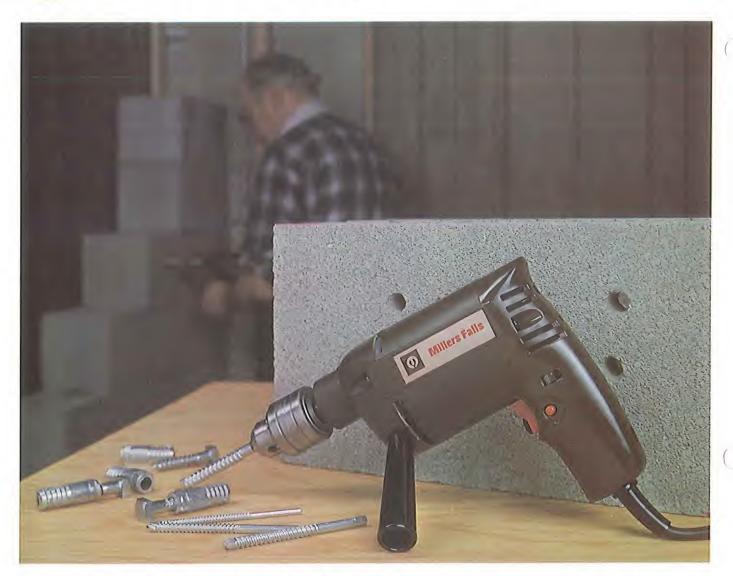

### TEAM UP WITH THE VARIABLE-SPEED-REVERSING PRO!



- A. Speed Control Knob to preset the exact drilling speed for each job.
- B. Reverse Switch for removing screws, nuts and drill bits.
- C. Lock Button makes continuous operations easier.

#### SPECIAL PERFORMANCE FEATURES:

- · Quick-Release Trigger Lock Button ideal for continuous jobs such as drilling, sanding, wire brushing and polishing.
- Double Reduction Gearing for smooth performance.
- Multi-Ball Thrust and Oil-Impregnated Sleeve Bearings ensure dependable, trouble-free high performance.
- Double Insulation provides maximum protection against electrical shock without grounding.
- Variable Speed Trigger Switch select the speed to match the job from 0 to 500 RPM. Drive screws, cut threads, start holes without center-punching (SP-5031 only).

SP-5031 Double Insulated ½" Variable-Speed-Reversing Professional Drill Specifications: Capacities: Steel ½", Hardwood 1", 0 to 500 RPM, 3.0 AMPS, 115-125 V. 25-60 Hz, U.L., Listed, C.S.A. Approved. (Side handle optional.)


SP-5030 Double Insulated ½" Deluxe Drill
Specifications: Capacities: Steel ½", Hardwood 1", 500 RPM, 3.0 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved. (Side handle optional.)

For Drill Accessories see pages 13, 14 and 15.

## NEW '5000' SERIES



## CUTS CONTOURS, BEVELS AND CURVES FOR HOME AND HOBBY



Cuts light metal safely in seconds. Base tilts up to 45° in either direction for beveling.

### SPECIAL PERFORMANCE FEATURES:


- Cuts All Materials wood, metal, plastics, compositions and plexiglass.
- Base Tilts Up to 45° in either direction for fast and easy bevel cuts.
- Exclusive Reversing Shoe for flush cutting along vertical surfaces.
- Patented Angled Blade Stroke designed for faster, smoother cutting.
- Automatic Air Blast clears sawdust for safer, more accurate cutting.
- Two Speeds high for wood, low for metals (SP-5041 only).
- Oil-Impregnated Sleeve Bearings ensure precise and accurate cuts plus long life.
- Double Insulation provides maximum protection against electrical shock without grounding.

(A) SP-5041 Double Insulated Deluxe Two Speed Sabre Saw Specifications: (Blade and hex key included.) Capacities: 2500 & 3200 Strokes/Min., 1/2" Stroke, 2.3 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved.

(B) SP-5040 Double Insulated Home Workshop Sabre Saw Specifications: (Blade and hex key included.) Capacities: 3200 Strokes/Min., ½" Stroke, 2.3 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved.

For Sabre Saw Accessories see page 26.

## NEW '5000' SERIES

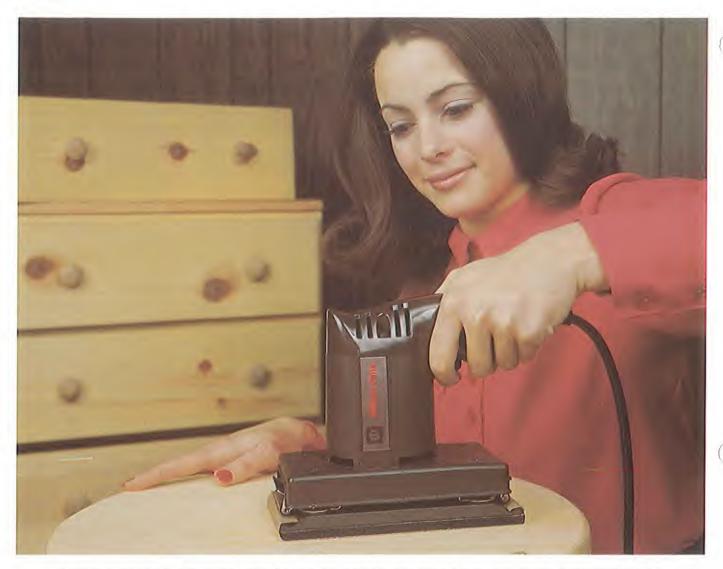

### HIGH-SPEED ACTION PROVIDES SWIRL-FREE FINISHES



Neoprene pad for wet or dry sanding.



Exclusive lock-in, roller clips for fast, easy and secure sandpaper replacement.

#### SPECIAL PERFORMANCE FEATURES:

- 10,000 High-Speed Orbits pure rubber bushings and high speed operation for swirl-free results.
- Permanently Resilient Neoprene Pad ideal for wet or dry sanding.
- Ball Bearings and Oil-Impregnated Sleeve Bearing positioned to ensure dependable, trouble-free performance.
- Light Weight for easier vertical and overhead sanding.
- Quick-Release Trigger Lock Button ideal for continuous sanding.
- Double Insulation provides maximum protection against electrical shock without grounding.

SP-5050 Double Insulated High Speed Orbital Sander Specifications: (Sandpaper Included) 10,000 Orbits Min., 1.8 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved.

For Orbital Sander Accessories see page 31.





### CUT HOME REMODELING JOBS DOWN TO SIZE!

#### SPECIAL PERFORMANCE FEATURES:

- Rip Guide/Blade Wrench Combination for fast, accurate ripping to uniform widths.
- Automatic Sawdust Blower keeps work area clean for improved visibility and safer operation.
- · High-Velocity Cooling System for lower motor temperature and longer running time.
- Oil-Impregnated Sleeve Bearings ensure dependable, trouble-free high performance.
- Double Insulation provides maximum protection against electrical shock without grounding.
- Chisel-Tooth Combination Blade included free as standard equipment.

SP-5070 Double Insulated 71/4" Circular Saw Specifications: (Combination Blade Included.) Capacities: 2¾" @ 90°, 1¼" @ 45°, 5000 RPM, 10.0 AMPS, 115-125 V. 25-60 Hz. U.L. Listed, C.S.A. Approved.

For Circular Saw Accessories see page 28.

Free combination rip guide and blade changing wrench.



### ONE YEAR REPLACEMENT WARRANTY

Millers Falls Company warrants to the original purchaser to replace by a new or like product any "5000 Series" power tool that fails within (1) one year of date of purchase due to a defect in material or workmanship. Replacement may be made by returning the tool to the dealer where purchased or to any authorized Millers Falls service station or distribution center with proof of purchase.

This warranty applies only to "5000 Series" power tools which have not been abused, misused or used in rental service, and is void if repairs or part replacements have been made or attempted.


#### WORLD-WIDE SERVICE

YOUR LOCAL MILLERS FALLS DEALER IS BACKED BY A NETWORK OF DISTRIBUTORS AND SERVICE CENTERS THROUGHOUT THE UNITED STATES, CANADA AND THE WORLD TO GIVE YOU FAST AND COURTEOUS SERVICE.

OO'SER

## 1/2" SQUARE DRIVE REVERSING IMPACTOOL®

## DOUBLE INSULATED

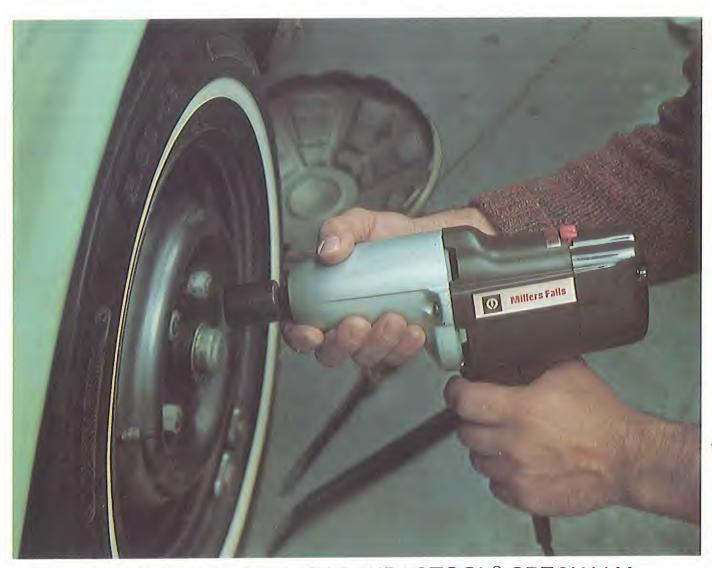

### THE FIRST ALL PURPOSE IMPACTOOL® SPECIALLY **DESIGNED AND PRICED** FOR THE HOME







Push button power for secure fastening.

#### SPECIAL PERFORMANCE FEATURES:

- Light Weight with easy one-hand grip operation.
- Full Power Reversing Switch delivers the power to loosen frozen bolts and nuts.
- High Temperature Motor ensures longer life with trouble-free performance.
- Oll-Impregnated Bronze Bearings give dependable, troublefree performance.
- High-Torque Output delivers 95/130 ft. lbs.
- Double Insulation provides maximum protection against electrical shock without grounding.

SP-5060 Double Insulated ½" Square Drive Reversing Impactool Specifications: Capacity: ½" Dia. Bolt, 2000 Impacts/Min., 1950 RPM, 4.5 AMPS, 115-125 V., 25-60 Hz. U.L. Listed, C.S.A. Approved. For Impactool Accessories see page 25.